


**Note:**

- Values stated in Specifications are for bracket only, tower structure to be checked for additional loading before installation
- All items finish hot dip galvanized
- All fasteners M10 Grade 8.8 HDG.
- All fasteners to be torqued 45Nm (±10%)
- Weight of bracket incl. fasteners =5.819kg. (Set of 2)

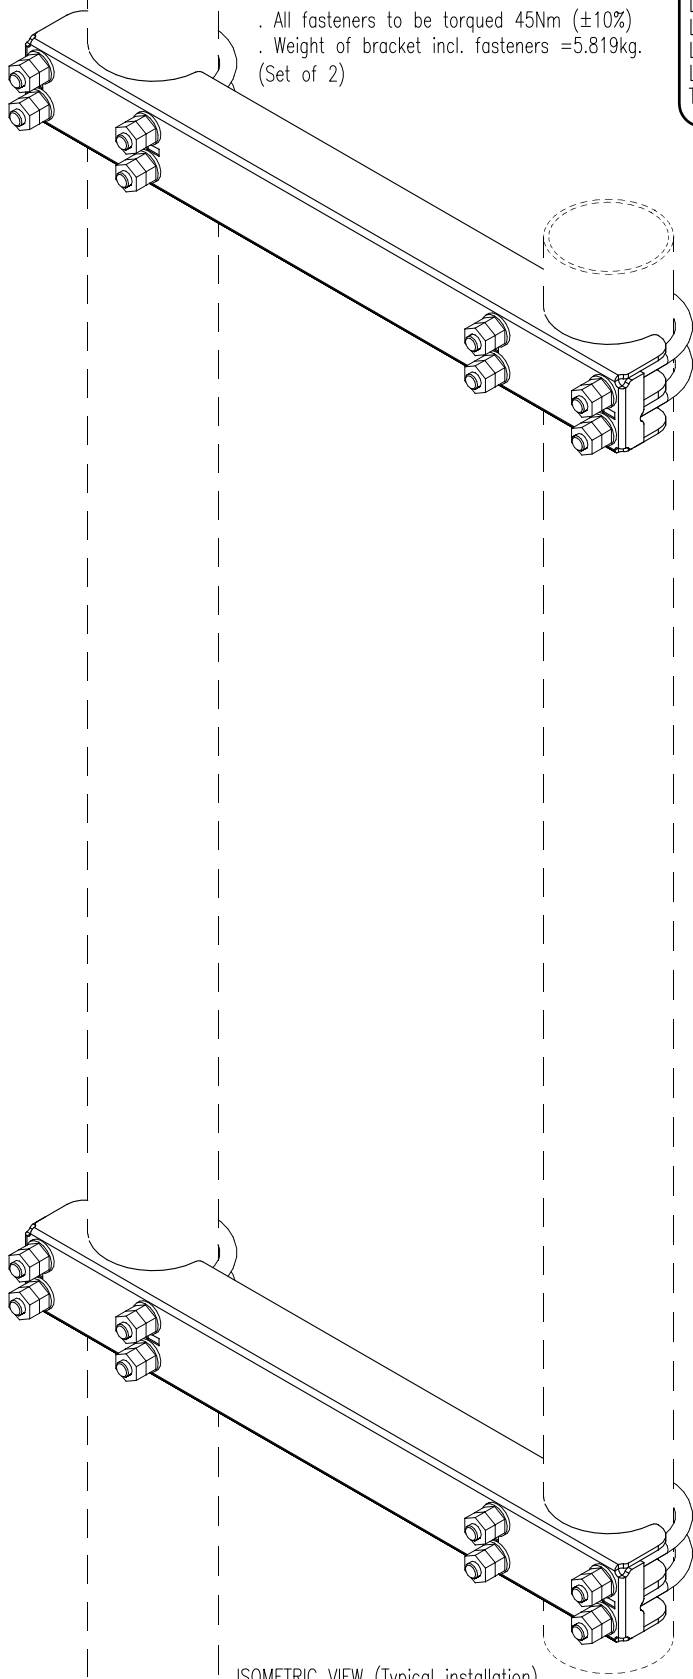

ISOMETRIC VIEW (Typical installation)

**Specifications**


Design Criteria	
SANS 10160(Wind load)	SANS 10162(Structural)
Safe work load	
Dead weight	A 120kg
Lateral loading (Front) Combined	B 180kg
Lateral loading (Side) Combined	C 80kg
Lateral loading (Back) Combined	D 180kg
Torque (On tubing)	E 240Nm

**Parts list**


Qty/Description	Part number
2x Ø76-Ø76 Pole to pole	GR124/302/01-00

**Fasteners list**

Description	Qty
M10 X Ø76 U-Bolt	8
M10 Hex nut	32
M10 Flat washer	16

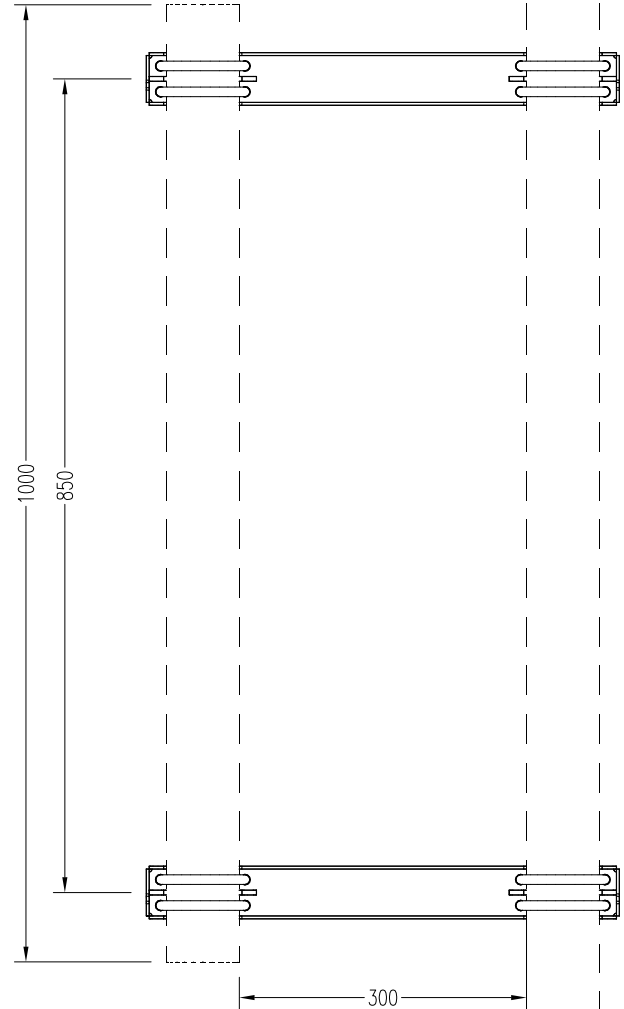

SIDE VIEW

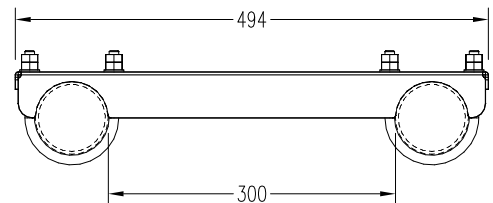

SIDE VIEW



**Graffo** Innovative wireless infrastructure solutions

Tel: +27 (0)21 905-0010

Fax: +27 (0)21 905-0020

Web: www.graffo.co.za

Ø76-Ø76, 300 stand-off  
Pole to Pole bracket  
Part no. : GR124-302-00-00A