


Note:

- . Values stated in Specifications are for bracket only, tower structure to be checked for additional loading before installation
- . All items finish hot dip galvanized
- . All fasteners M10 Grade 8.8 HDG.
- . All fasteners to be torqued 45Nm ($\pm 10\%$)
- . Weight of bracket incl. fasteners =5.59kg. (Set of 2)

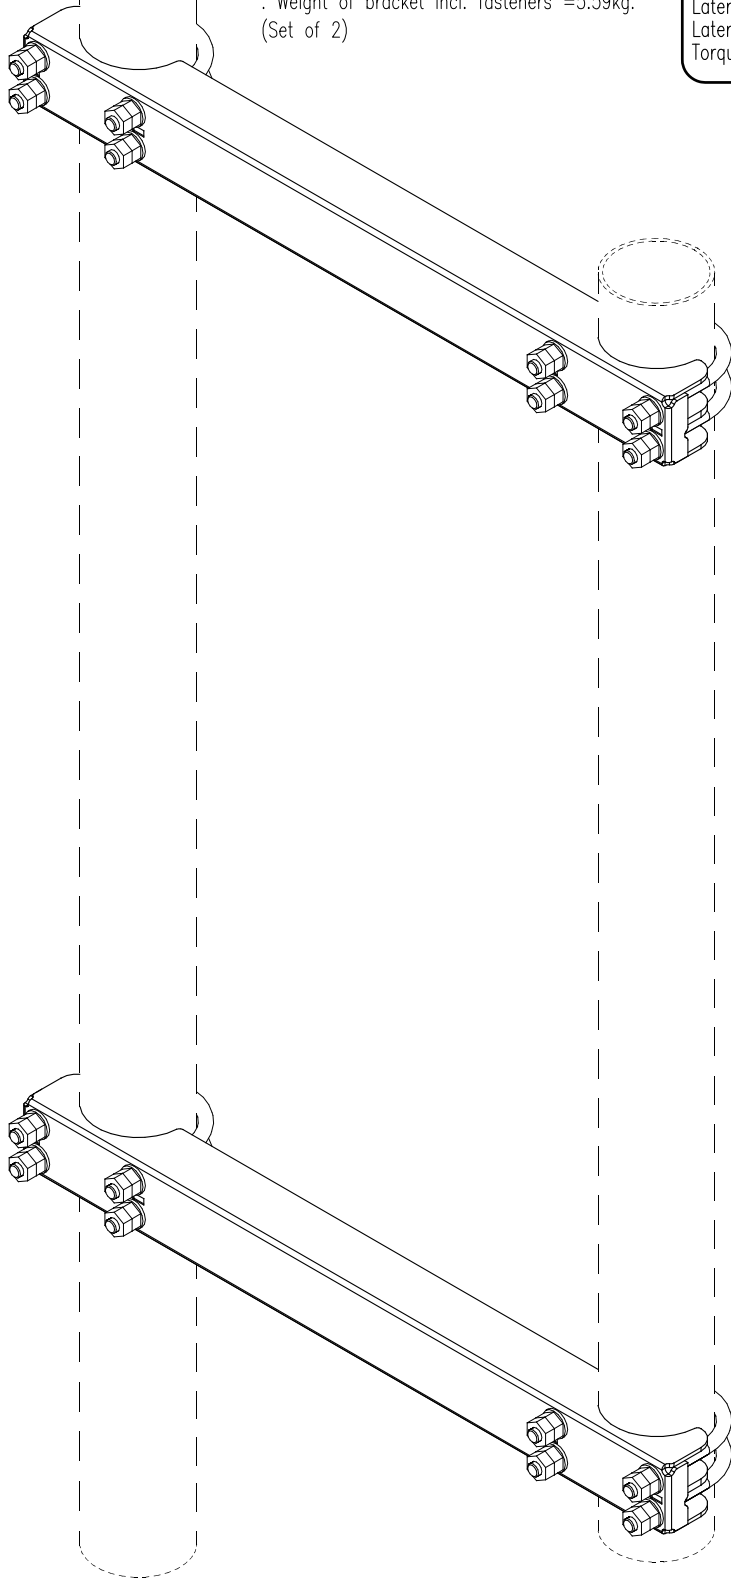

ISOMETRIC VIEW (Typical installation)

Specifications


Design Criteria	
SANS 10160(Wind load)	SANS 10162(Structural)
Safe work load	
Dead weight	A 120kg
Lateral loading (Front) Combined	B 180kg
Lateral loading (Side) Combined	C 80kg
Lateral loading (Back) Combined	D 180kg
Torque (On tubing)	E 240Nm

Parts list

Qty/Description	Part number
2x $\phi 76-\phi 76$ Pole to pole	GR124/301/01-00

Fasteners list

Description	Qty
M10 X $\phi 76$ U-Bolt	8
M10 Hex nut	32
M10 Flat washer	16

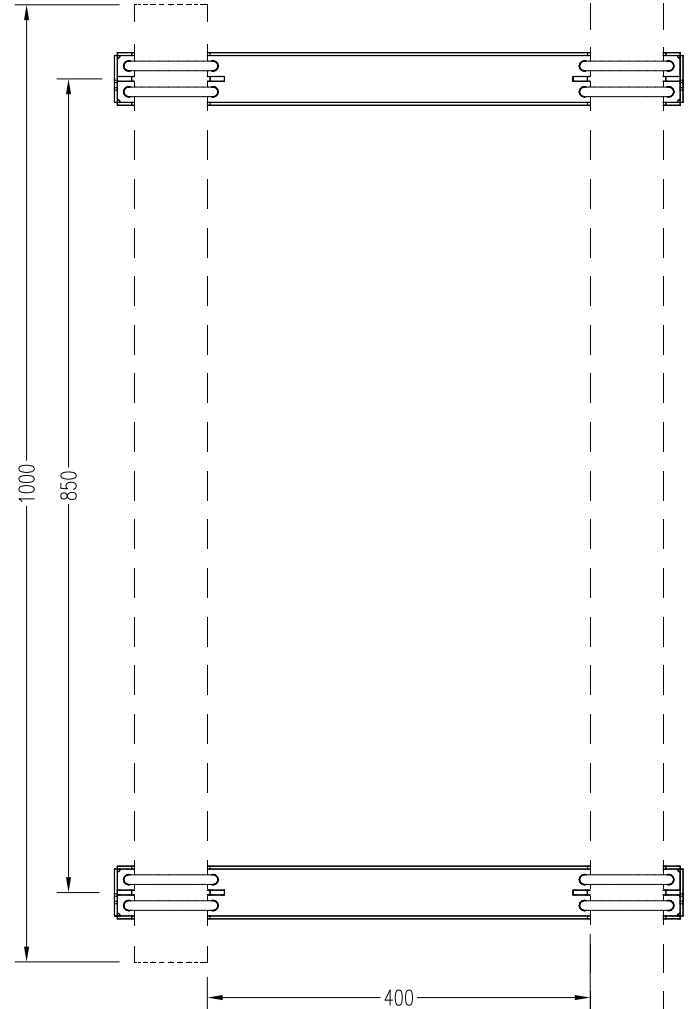

SIDE VIEW



SIDE VIEW



Graffo Innovative wireless infrastructure solutions

Tel: +27 (0)21 905-0010

Fax: +27 (0)21 905-0020

Web: www.graffo.co.za

$\phi 76-\phi 76$, 400 stand-off Pole to Pole bracket
Part no. : GR124-301-00-00A